


AD103-16、22

Φ16、22系列信号灯

型号含义

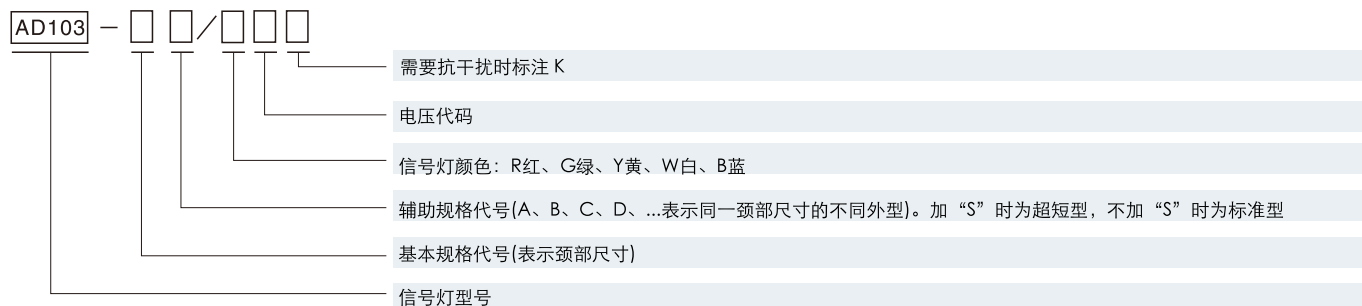

主要技术指标

- 1、工频耐压: 2.5KV(交流有效值), 1min。
- 2、绝缘电阻 $\geq 2M\Omega$
- 3、交流指示灯允许电压波动 $\pm 20\%$
- 4、连续工作寿命 ≥ 30000 小时
- 5、光亮度 $\geq 100cd/m^2$
- 6、相比漏电起痕指数CTI $\geq 175V$
- 7、头部防护等级IP40, IP65, 可定制IP67
- 8、使用频率AC50~60Hz

适用环境


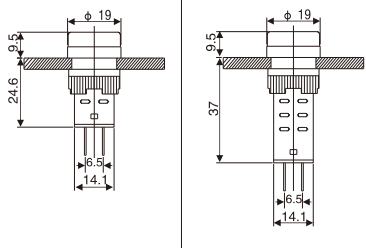

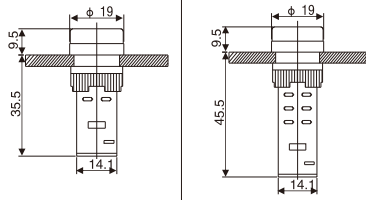
- 1、环境温度: $-25^{\circ}C \sim +55^{\circ}C$;
- 2、空气相对湿度 $\leq 98\%$;
- 3、在振动频率为2~80Hz加速度为0.7g下能正常工作;
- 4、污染等级为3级, 安装类别为III类;
- 5、有“TH”标志的能在湿热带环境下工作。

电压代码对照表

| 电压代码 | 电源 | 电压 |
|------|-------|------|
| 21 | AC/DC | 6V |
| 22 | | 12V |
| 23 | | 24V |
| 24 | | 36V |
| 25 | | 48V |
| 26 | | 110V |
| 27 | | 127V |
| 28 | DC | 220V |
| 31 | AC | 220V |
| 32 | | 380V |

AD103-16

Φ 16系列信号灯


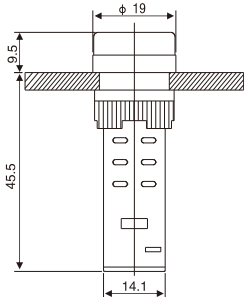




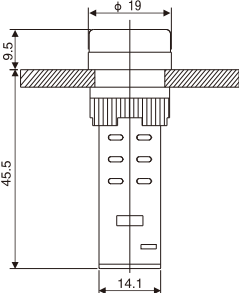

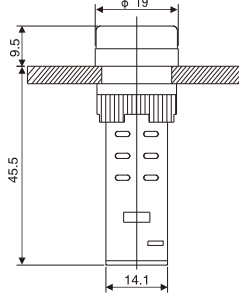
| 外形图 | 名称 | 型号 | 颜色 | 带灯电压 | 外形尺寸 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|--|--|--|-------|-------|----|----|-------|-----|----|-------|-----|----|-------|-----|----|-------|-----|----|-------|------|----|-------|------|----|----|------|----|----|------|----|----|------|---|
|  | C型信号灯 | AD103-16C / ■ ■ | ● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W | <table border="1"> <tr><td>21</td><td>AC,DC</td><td>6V</td></tr> <tr><td>22</td><td>AC,DC</td><td>12V</td></tr> <tr><td>23</td><td>AC,DC</td><td>24V</td></tr> <tr><td>24</td><td>AC,DC</td><td>36V</td></tr> <tr><td>25</td><td>AC,DC</td><td>48V</td></tr> <tr><td>26</td><td>AC,DC</td><td>110V</td></tr> <tr><td>27</td><td>AC,DC</td><td>127V</td></tr> <tr><td>28</td><td>DC</td><td>220V</td></tr> <tr><td>31</td><td>AC</td><td>220V</td></tr> <tr><td>32</td><td>AC</td><td>380V</td></tr> </table> | 21 | AC,DC | 6V | 22 | AC,DC | 12V | 23 | AC,DC | 24V | 24 | AC,DC | 36V | 25 | AC,DC | 48V | 26 | AC,DC | 110V | 27 | AC,DC | 127V | 28 | DC | 220V | 31 | AC | 220V | 32 | AC | 380V |  |
| | | 21 | | | AC,DC | 6V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | AC,DC | 12V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23 | AC,DC | 24V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | AC,DC | 36V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | AC,DC | 48V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26 | AC,DC | 110V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | AC,DC | 127V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 28 | DC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | AC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 | AC | 380V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AD103-16CS / ■ ■ |  | D型信号灯 | AD103-16D / ■ ■ |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AD103-16DS / ■ ■ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

说 明

- 1、产品均采用纯色高亮度LED光源；
- 2、C为插脚接线方式,D为螺丝接线方式,S为超短型；
- 3、如需抗干扰（40V）、抗浪涌请在定货时特别注明；
- 4、Φ 16信号灯外壳均采用进口阻燃增强尼龙制作；
- 5、透明外罩采用进口聚碳酸酯制作，外型美观，色泽鲜艳，抗高强度冲击。

AD103-16

φ16系列信号灯

| 外形图 | 名称 | 型号 | 颜色 | 带灯电压 | 外形尺寸 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------|--|---|--|------|-------|----|----|-------|-----|----|-------|-----|----|-------|-----|----|-------|-----|----|-------|------|----|-------|------|----|----|------|----|----|------|----|----|------|--|
|  | 闪光灯 | AD103-16S/ ■ ■ | <ul style="list-style-type: none"> ● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W | <table border="1"> <tr><td>21</td><td>AC/DC</td><td>6V</td></tr> <tr><td>22</td><td>AC/DC</td><td>12V</td></tr> <tr><td>23</td><td>AC/DC</td><td>24V</td></tr> <tr><td>24</td><td>AC/DC</td><td>36V</td></tr> <tr><td>25</td><td>AC/DC</td><td>48V</td></tr> <tr><td>26</td><td>AC/DC</td><td>110V</td></tr> <tr><td>27</td><td>AC/DC</td><td>127V</td></tr> <tr><td>28</td><td>DC</td><td>220V</td></tr> <tr><td>31</td><td>AC</td><td>220V</td></tr> <tr><td>32</td><td>AC</td><td>380V</td></tr> </table> | 21 | AC/DC | 6V | 22 | AC/DC | 12V | 23 | AC/DC | 24V | 24 | AC/DC | 36V | 25 | AC/DC | 48V | 26 | AC/DC | 110V | 27 | AC/DC | 127V | 28 | DC | 220V | 31 | AC | 220V | 32 | AC | 380V |  |
| 21 | AC/DC | 6V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | AC/DC | 12V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23 | AC/DC | 24V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | AC/DC | 36V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | AC/DC | 48V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26 | AC/DC | 110V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | AC/DC | 127V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 28 | DC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | AC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 | AC | 380V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  | 双色灯 | AD103-16SS/ ■ ■ | <ul style="list-style-type: none"> ● 红-R ● 绿-G | <table border="1"> <tr><td>21</td><td>AC/DC</td><td>6V</td></tr> <tr><td>22</td><td>AC/DC</td><td>12V</td></tr> <tr><td>23</td><td>AC/DC</td><td>24V</td></tr> <tr><td>24</td><td>AC/DC</td><td>36V</td></tr> <tr><td>25</td><td>AC/DC</td><td>48V</td></tr> <tr><td>26</td><td>AC/DC</td><td>110V</td></tr> <tr><td>27</td><td>AC/DC</td><td>127V</td></tr> <tr><td>28</td><td>DC</td><td>220V</td></tr> <tr><td>31</td><td>AC</td><td>220V</td></tr> <tr><td>32</td><td>AC</td><td>380V</td></tr> </table> | 21 | AC/DC | 6V | 22 | AC/DC | 12V | 23 | AC/DC | 24V | 24 | AC/DC | 36V | 25 | AC/DC | 48V | 26 | AC/DC | 110V | 27 | AC/DC | 127V | 28 | DC | 220V | 31 | AC | 220V | 32 | AC | 380V | <p>交直流型 (AC · DC)</p>   |
| 21 | AC/DC | 6V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | AC/DC | 12V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23 | AC/DC | 24V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | AC/DC | 36V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | AC/DC | 48V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26 | AC/DC | 110V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | AC/DC | 127V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 28 | DC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | AC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 | AC | 380V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  | 蜂鸣器 | AD103-16FM/ ■ ■ A (连续声) AD103-16FM/ ■ ■ B (间断声) | <ul style="list-style-type: none"> ● 黑-K ● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W | <table border="1"> <tr><td>21</td><td>AC/DC</td><td>6V</td></tr> <tr><td>22</td><td>AC/DC</td><td>12V</td></tr> <tr><td>23</td><td>AC/DC</td><td>24V</td></tr> <tr><td>24</td><td>AC/DC</td><td>36V</td></tr> <tr><td>25</td><td>AC/DC</td><td>48V</td></tr> <tr><td>26</td><td>AC/DC</td><td>110V</td></tr> <tr><td>27</td><td>AC/DC</td><td>127V</td></tr> <tr><td>28</td><td>DC</td><td>220V</td></tr> <tr><td>31</td><td>AC</td><td>220V</td></tr> <tr><td>32</td><td>AC</td><td>380V</td></tr> </table> | 21 | AC/DC | 6V | 22 | AC/DC | 12V | 23 | AC/DC | 24V | 24 | AC/DC | 36V | 25 | AC/DC | 48V | 26 | AC/DC | 110V | 27 | AC/DC | 127V | 28 | DC | 220V | 31 | AC | 220V | 32 | AC | 380V |  |
| 21 | AC/DC | 6V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | AC/DC | 12V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23 | AC/DC | 24V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | AC/DC | 36V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | AC/DC | 48V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26 | AC/DC | 110V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | AC/DC | 127V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 28 | DC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | AC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 | AC | 380V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  | 闪光蜂鸣器 | AD103-16SM/ ■ ■ (间断声) | <ul style="list-style-type: none"> ● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W | <table border="1"> <tr><td>21</td><td>AC/DC</td><td>6V</td></tr> <tr><td>22</td><td>AC/DC</td><td>12V</td></tr> <tr><td>23</td><td>AC/DC</td><td>24V</td></tr> <tr><td>24</td><td>AC/DC</td><td>36V</td></tr> <tr><td>25</td><td>AC/DC</td><td>48V</td></tr> <tr><td>26</td><td>AC/DC</td><td>110V</td></tr> <tr><td>27</td><td>AC/DC</td><td>127V</td></tr> <tr><td>28</td><td>DC</td><td>220V</td></tr> <tr><td>31</td><td>AC</td><td>220V</td></tr> <tr><td>32</td><td>AC</td><td>380V</td></tr> </table> | 21 | AC/DC | 6V | 22 | AC/DC | 12V | 23 | AC/DC | 24V | 24 | AC/DC | 36V | 25 | AC/DC | 48V | 26 | AC/DC | 110V | 27 | AC/DC | 127V | 28 | DC | 220V | 31 | AC | 220V | 32 | AC | 380V |  |
| 21 | AC/DC | 6V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | AC/DC | 12V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 23 | AC/DC | 24V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | AC/DC | 36V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | AC/DC | 48V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 26 | AC/DC | 110V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | AC/DC | 127V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 28 | DC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 | AC | 220V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 32 | AC | 380V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |